


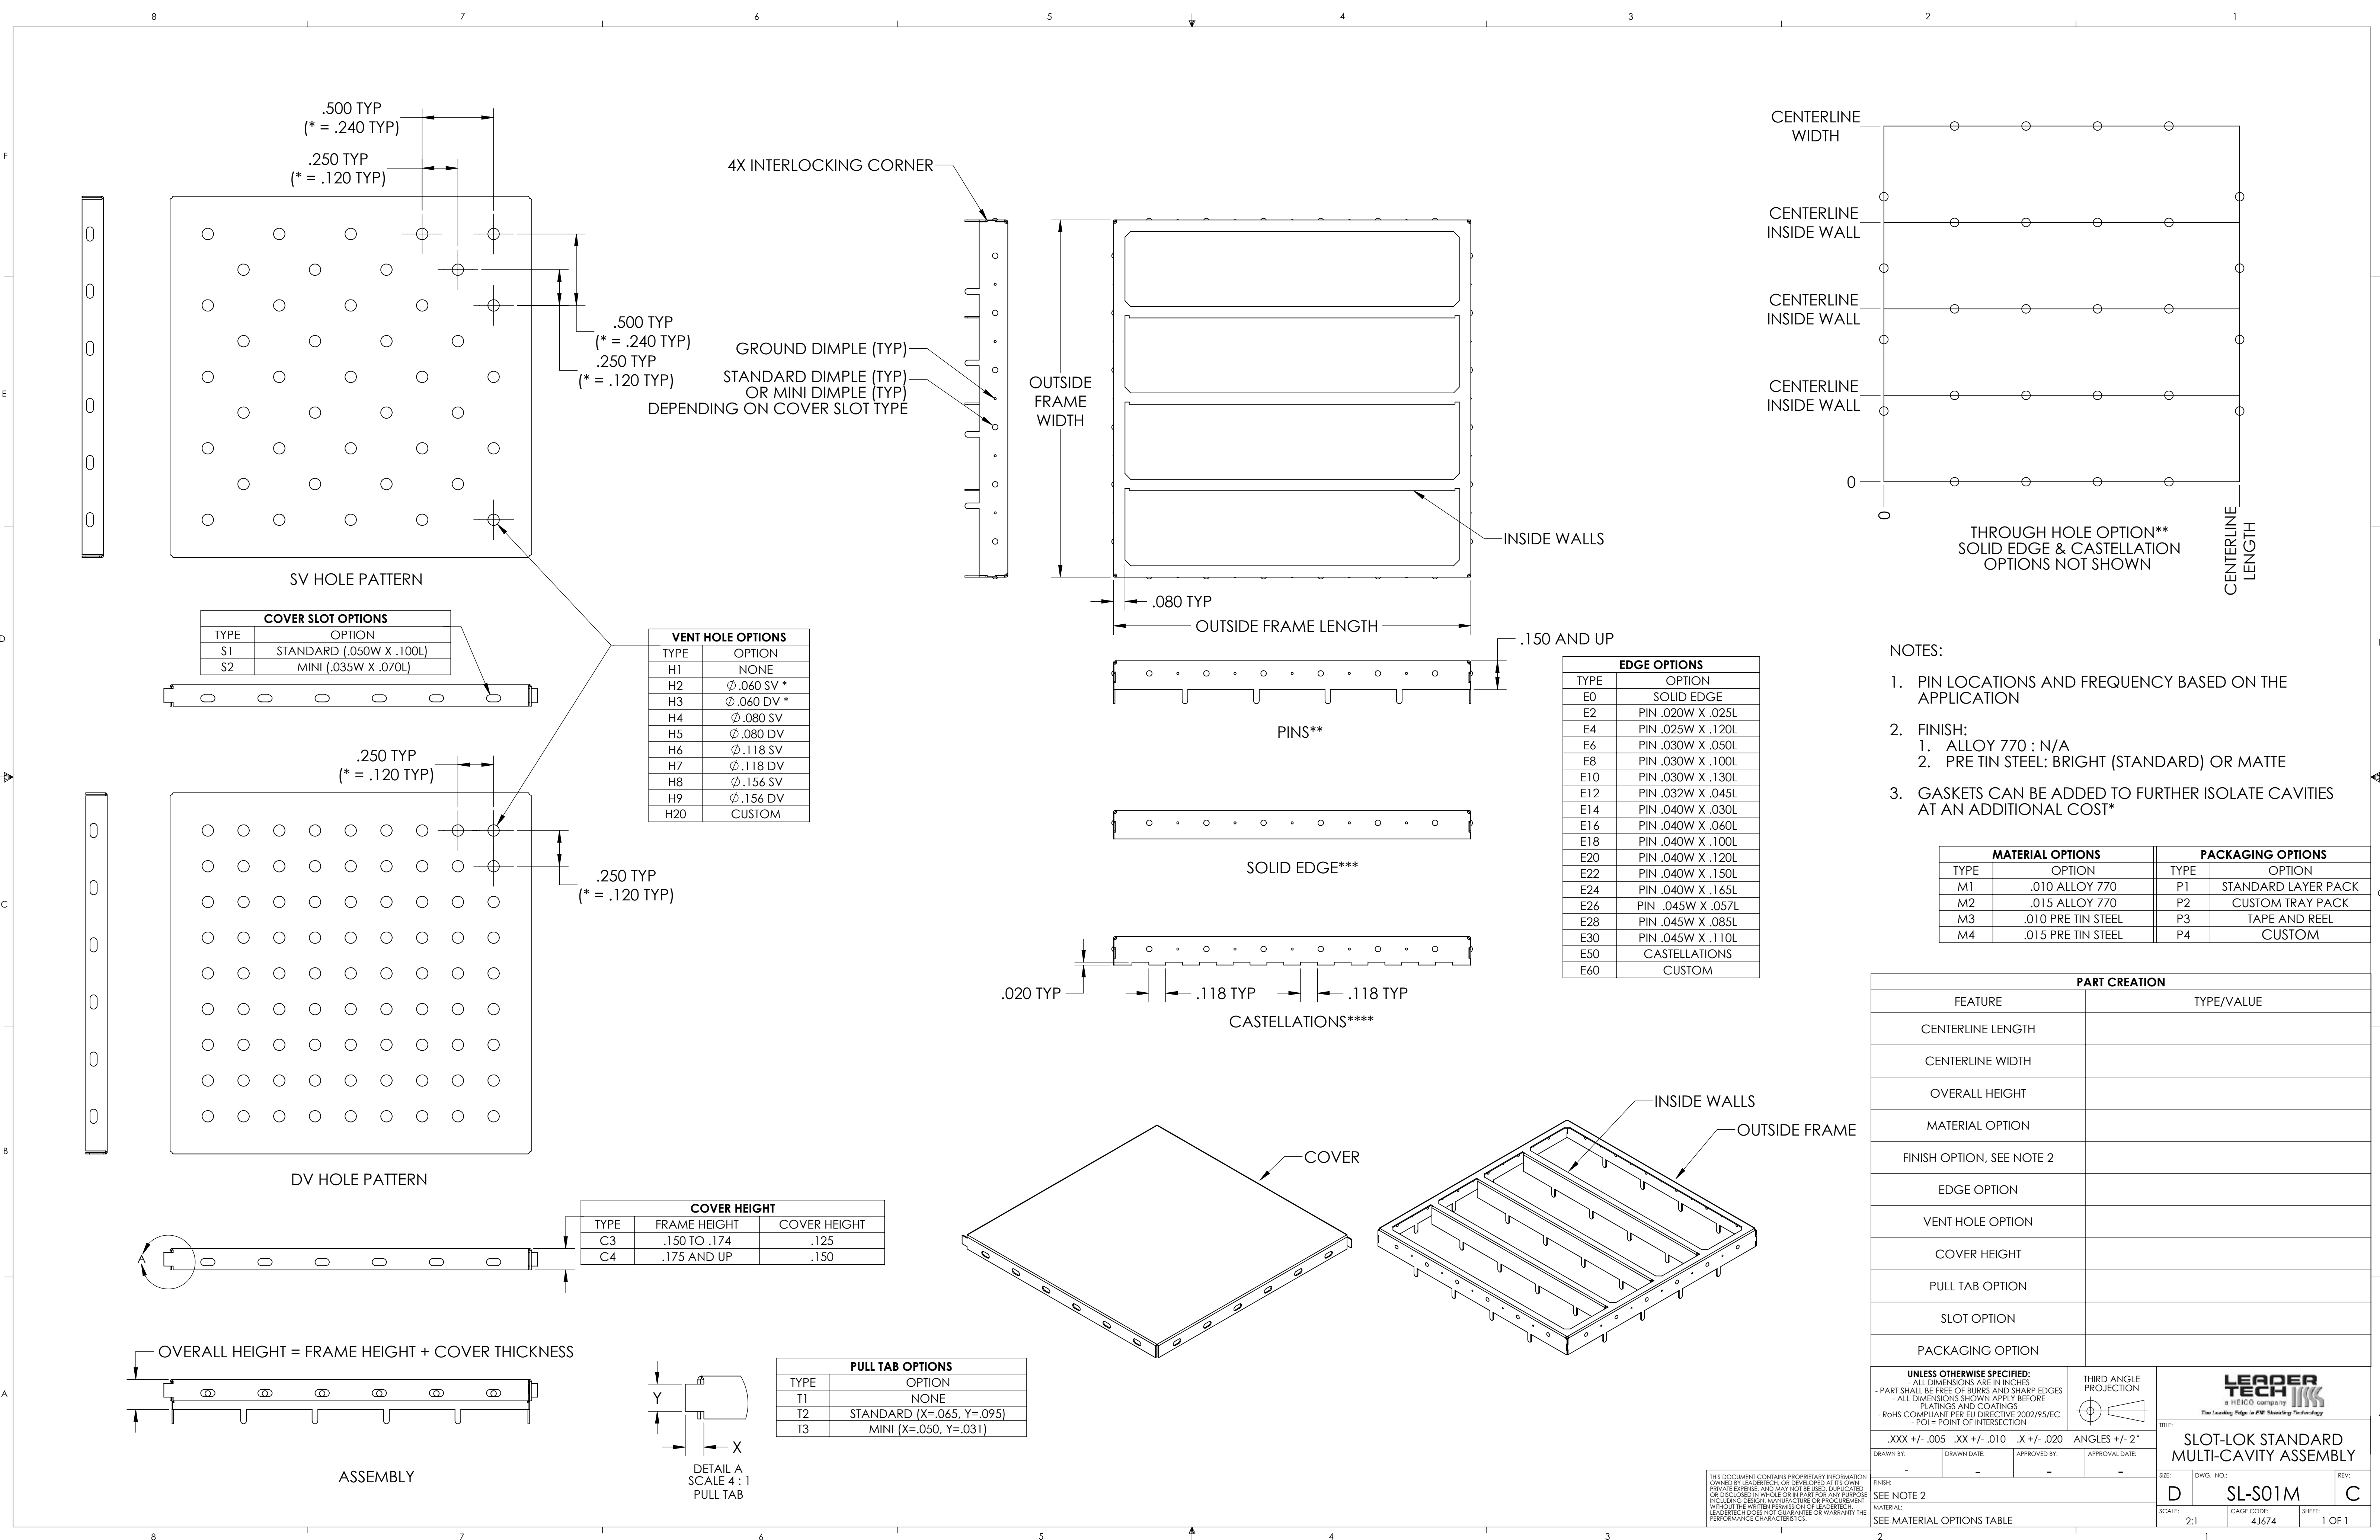

- NOTES:
- PIN LOCATIONS AND FREQUENCY BASED ON THE APPLICATION
 - FINISH:
 - ALLOY 770 : N/A
 - PRE TIN STEEL: BRIGHT (STANDARD) OR MATTE
 - GASKETS CAN BE ADDED TO FURTHER ISOLATE CAVITIES AT AN ADDITIONAL COST*

MATERIAL OPTIONS		PACKAGING OPTIONS	
TYPE	OPTION	TYPE	OPTION
M1	.010 ALLOY 770	P1	STANDARD LAYER PACK
M2	.015 ALLOY 770	P2	CUSTOM TRAY PACK
M3	.010 PRE TIN STEEL	P3	TAPE AND REEL
M4	.015 PRE TIN STEEL	P4	CUSTOM

PART CREATION	
FEATURE	TYPE/VALUE
CENTERLINE LENGTH	
CENTERLINE WIDTH	
OVERALL HEIGHT	
MATERIAL OPTION	
FINISH OPTION, SEE NOTE 2	
EDGE OPTION	
VENT HOLE OPTION	
COVER HEIGHT	
PULL TAB OPTION	
SLOT OPTION	
PACKAGING OPTION	
UNLESS OTHERWISE SPECIFIED: - ALL DIMENSIONS ARE IN INCHES - PART SHALL BE FREE OF BURRS AND SHARP EDGES - ALL DIMENSIONS SHOWN APPLY BEFORE PLATING AND COATINGS - ROHS COMPLIANT PER EU DIRECTIVE 2002/95/EC - POI = POINT OF INTERSECTION THIRD ANGLE PROJECTION	
ANGLES +/- 2°	
DRAWN BY:	APPROVED BY:
DATE:	DATE:
SEE NOTE 2	
MATERIAL:	
SEE MATERIAL OPTIONS TABLE	
SIZE:	DWG. NO.:
D	SL-S01M
SCALE:	SHEET:
2:1	1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OWNED BY LEADERTECH OR DEVELOPED AT ITS OWN PRIVATE EXPENSE AND MAY NOT BE USED, DUPLICATED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE INCLUDING DESIGN, MANUFACTURE OR PROCUREMENT WITHOUT THE WRITTEN PERMISSION OF LEADERTECH. LEADERTECH DOES NOT GUARANTEE OR WARRANT THE PERFORMANCE CHARACTERISTICS.



TITLE:
SLOT-LOK STANDARD
MULTI-CAVITY ASSEMBLY