

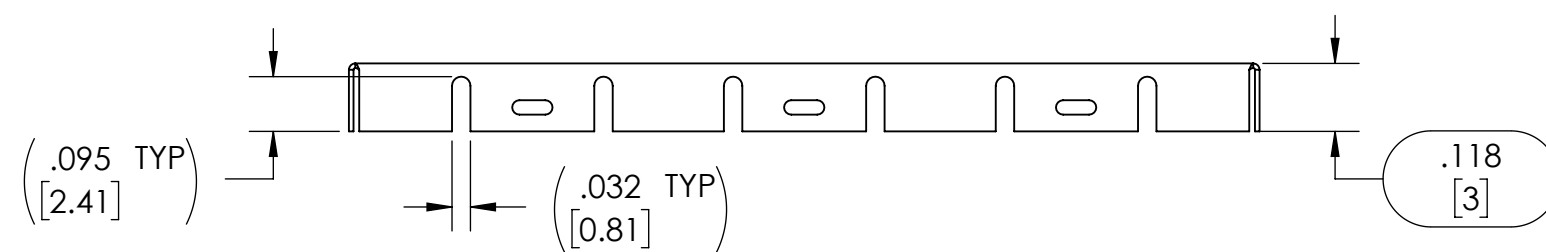
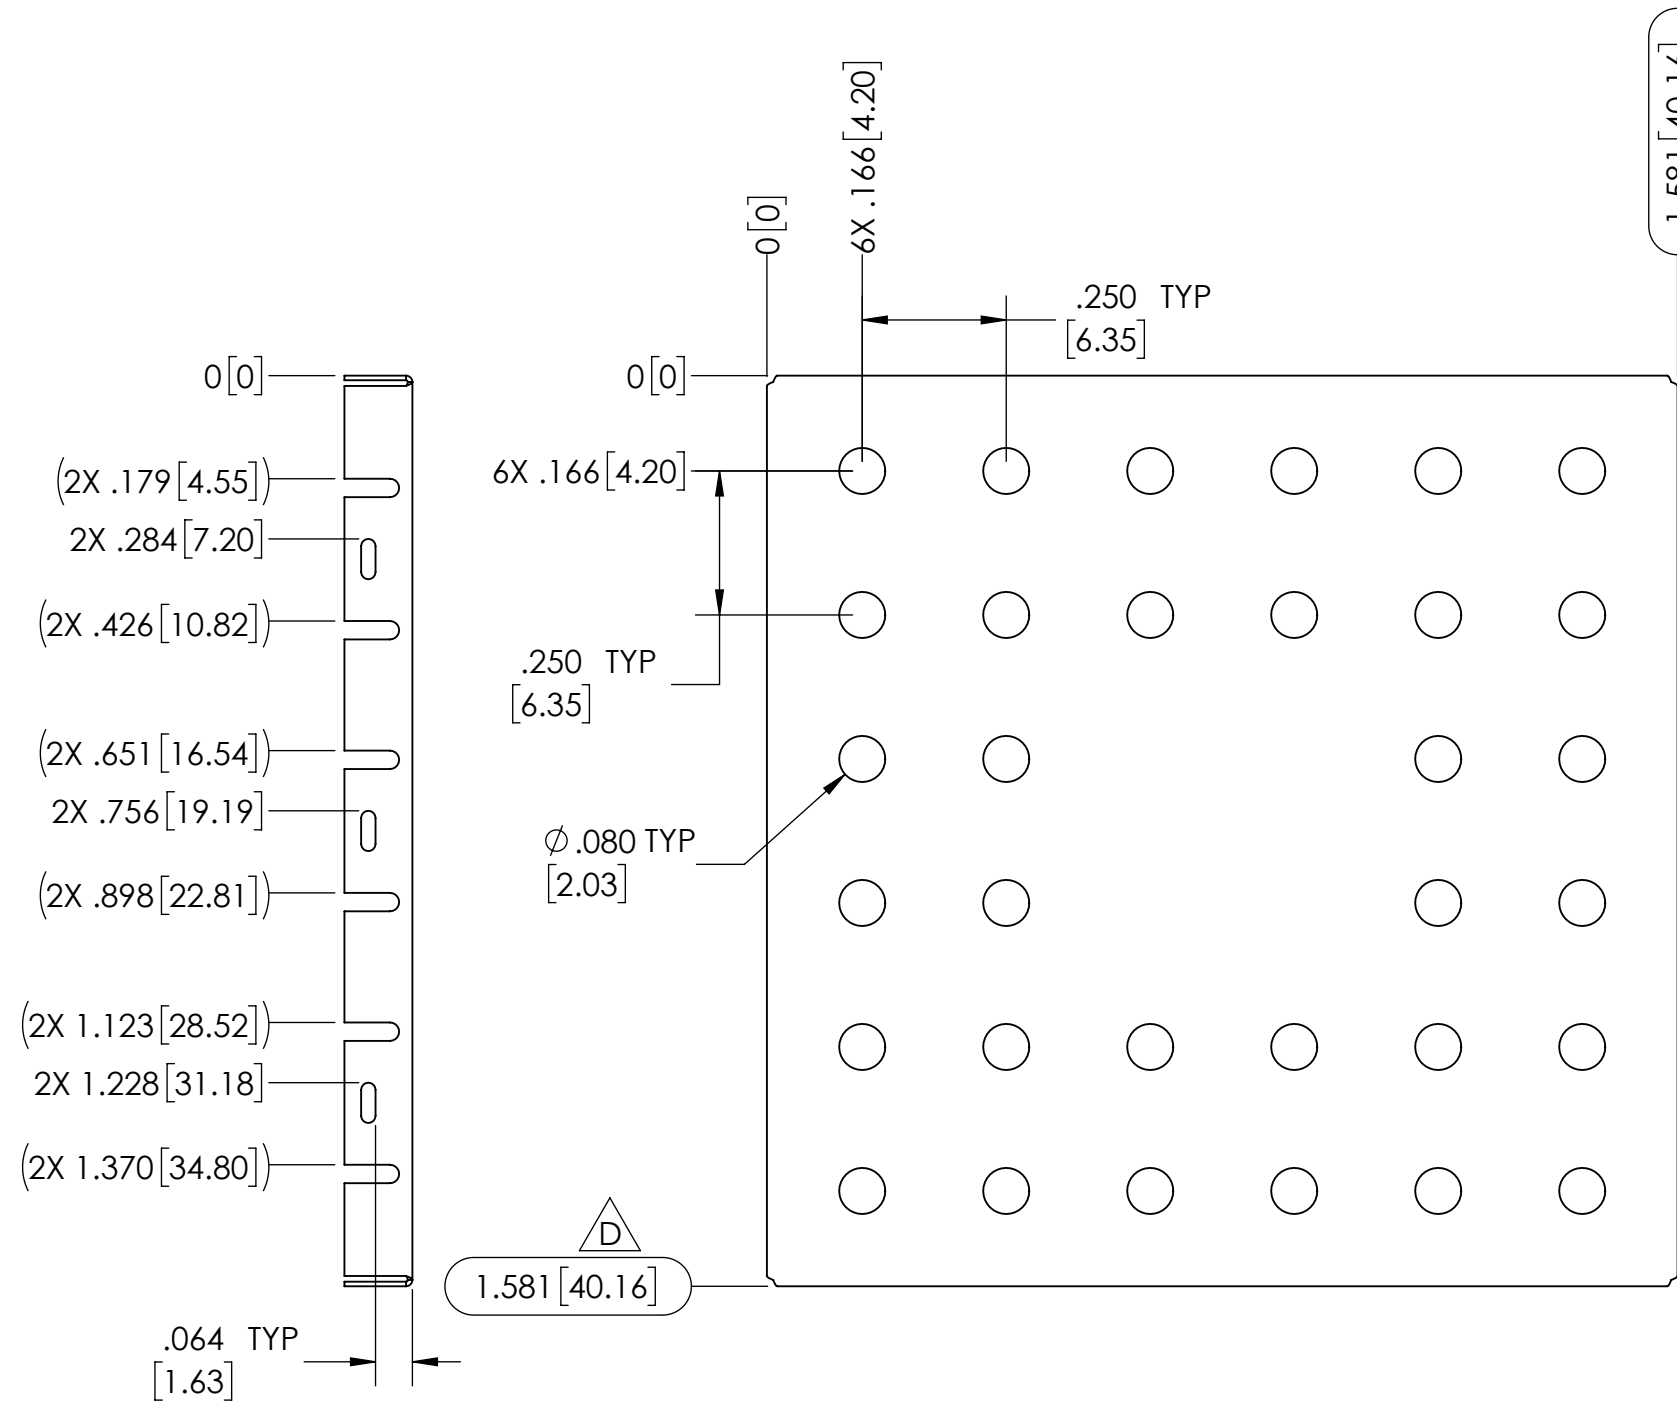





1. ASSURE ASSEMBLY CAPABILITY BY MATCHING WITH MATING PART
2. MINI DIMPLE (TYP): SIZE FOR BEST FIT WITH COVER, NEAR SIDE PROTRUSION
3. DIMENSIONS IN [] ARE IN MILLIMETERS

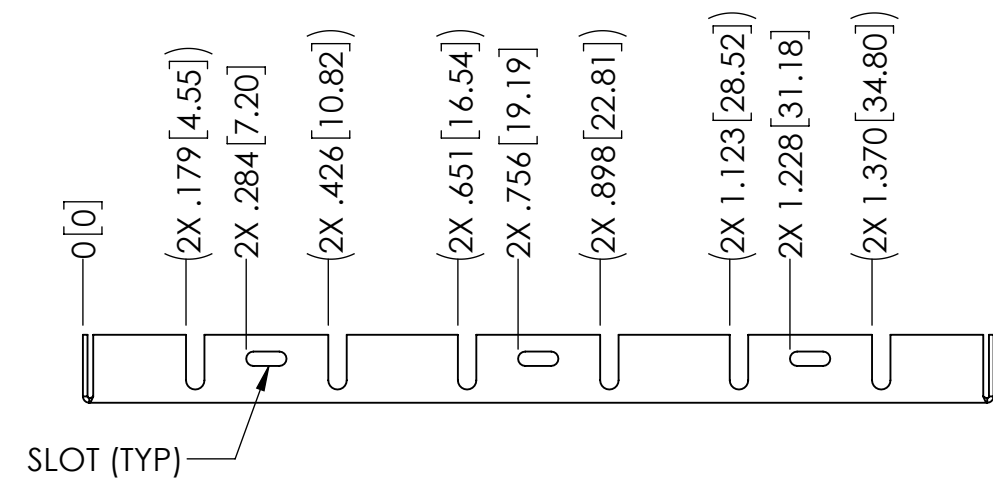


FORMED COVER

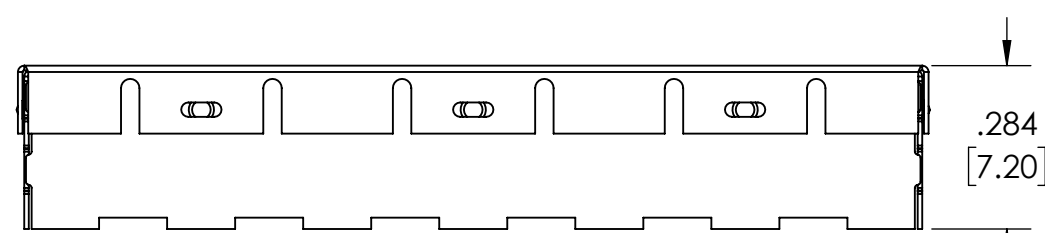

ASSEMBLY

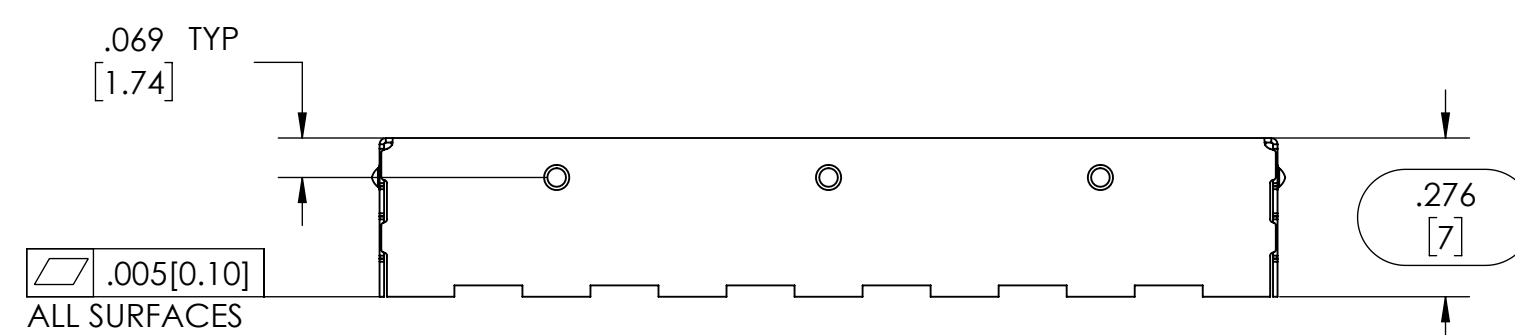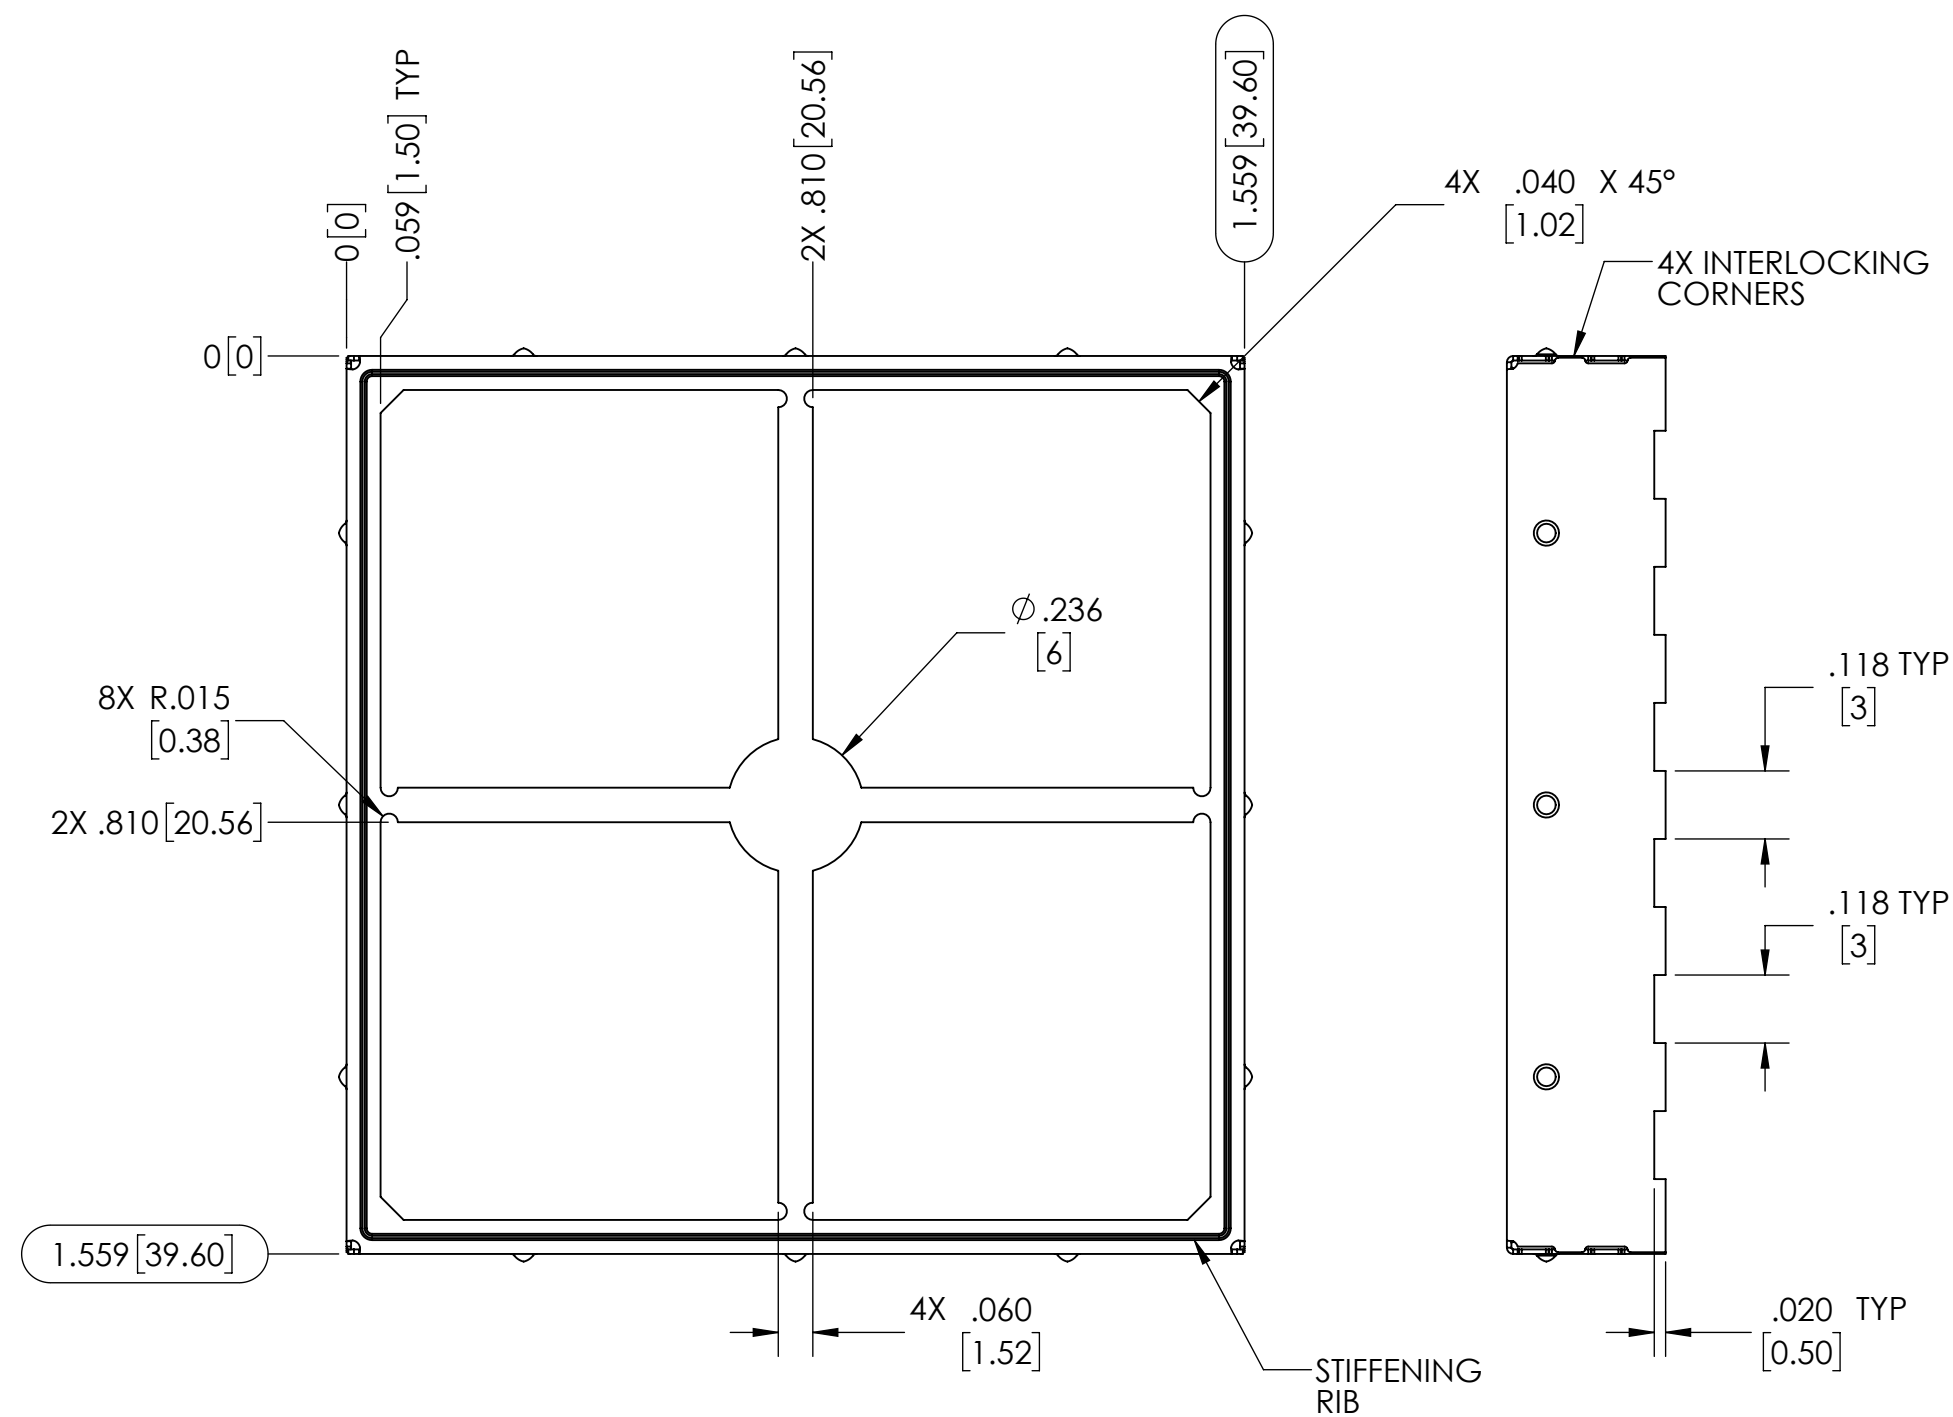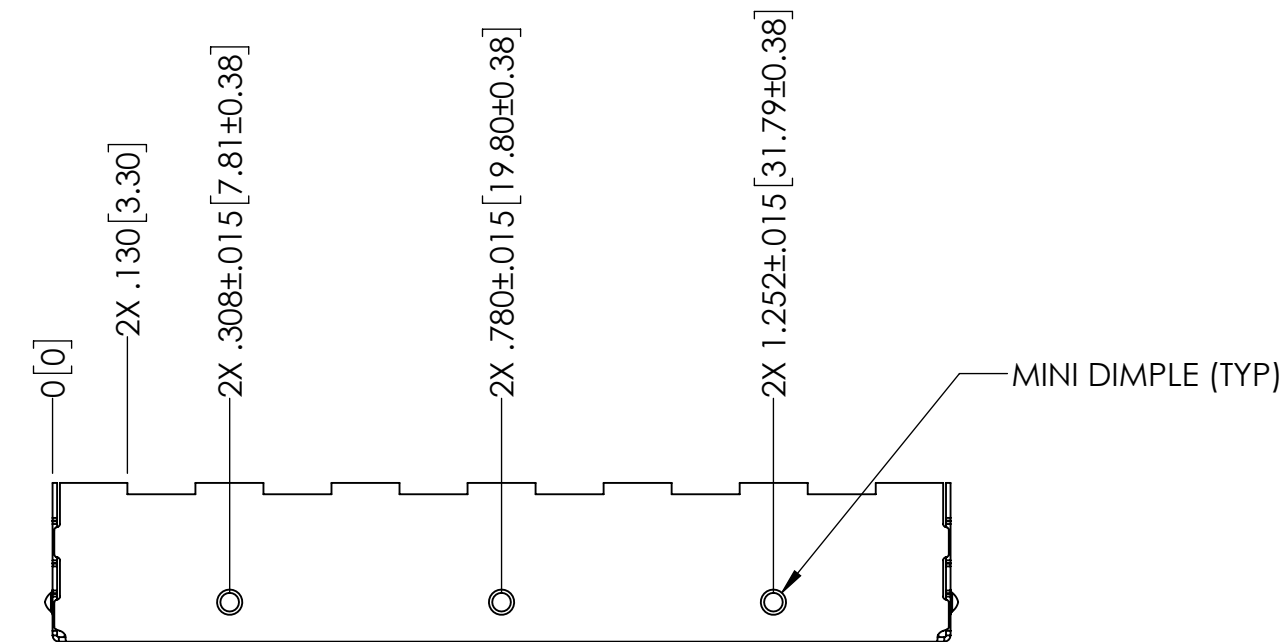




FORMED FRAME

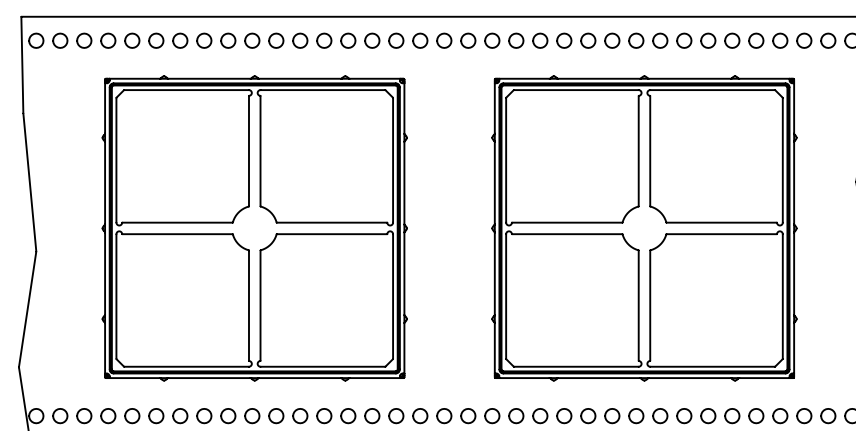

CARRIER TAPE

CARRIER TAPE SPECIFICATIONS						
PART NUMBER	DESCRIPTION	OVERALL DIMENSION	OVERALL HEIGHT	CARRIER TAPE WIDTH	CARRIER TAPE PITCH	PARTS PER REEL
SMS-208-N-F	FRAME	1.559 X 1.559 (39.60 X 39.60)	.276 (7.00)	56 mm	48 mm	150
SMS-208-N-C	COVER	1.581 X 1.581 (40.16 X 40.16)	.118 (3.00)	N/A	N/A	BULK PACK

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OWNED BY LEADERTECH, OR DEVELOPED AT ITS OWN PRIVATE EXPENSE, AND MAY NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE INCLUDING DESIGN, MANUFACTURE OR PROCUREMENT WITHOUT THE WRITTEN PERMISSION OF LEADERTECH. LEADERTECH DOES NOT GUARANTEE OR WARRANTY THE PERFORMANCE CHARACTERISTICS.

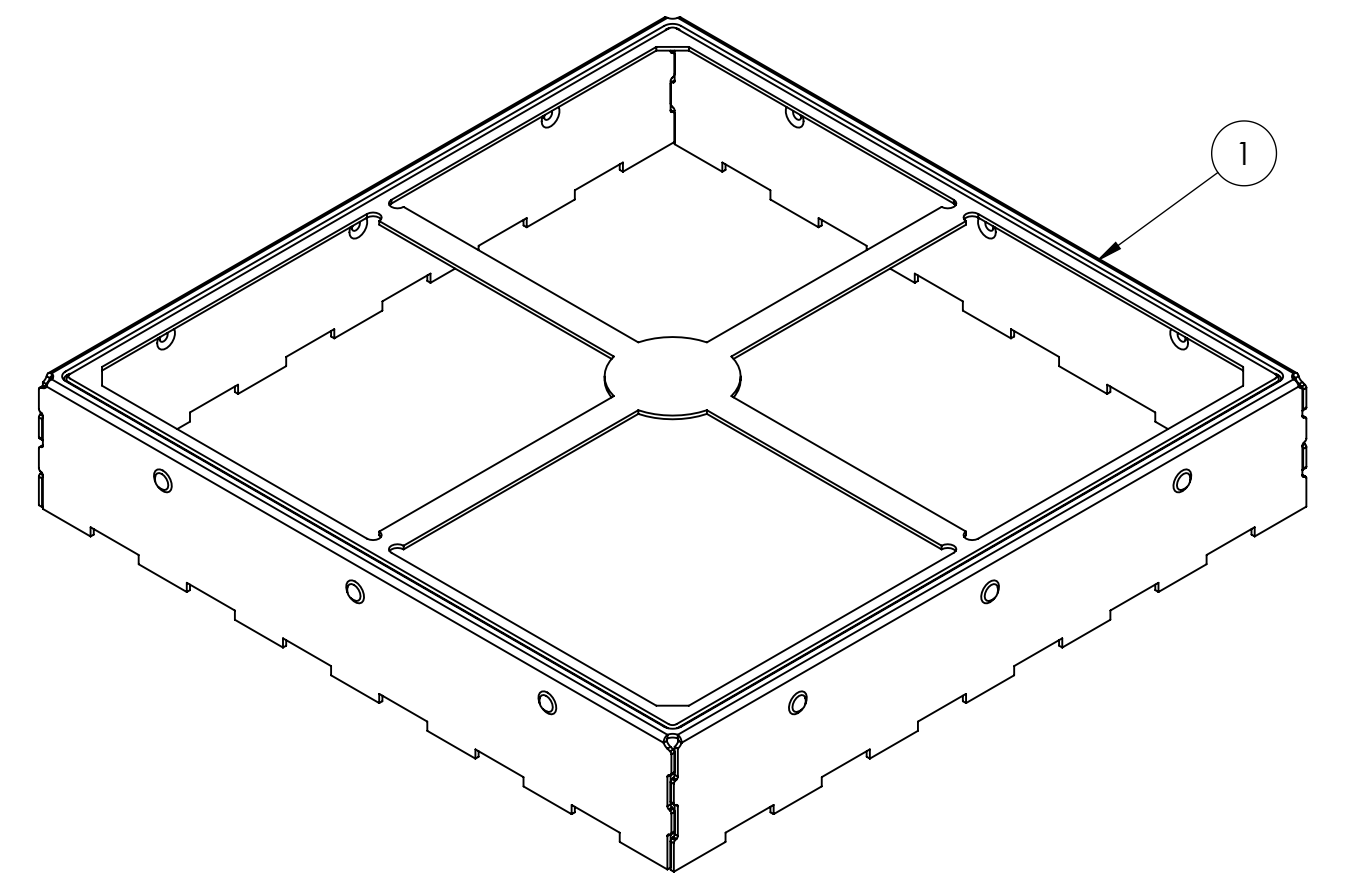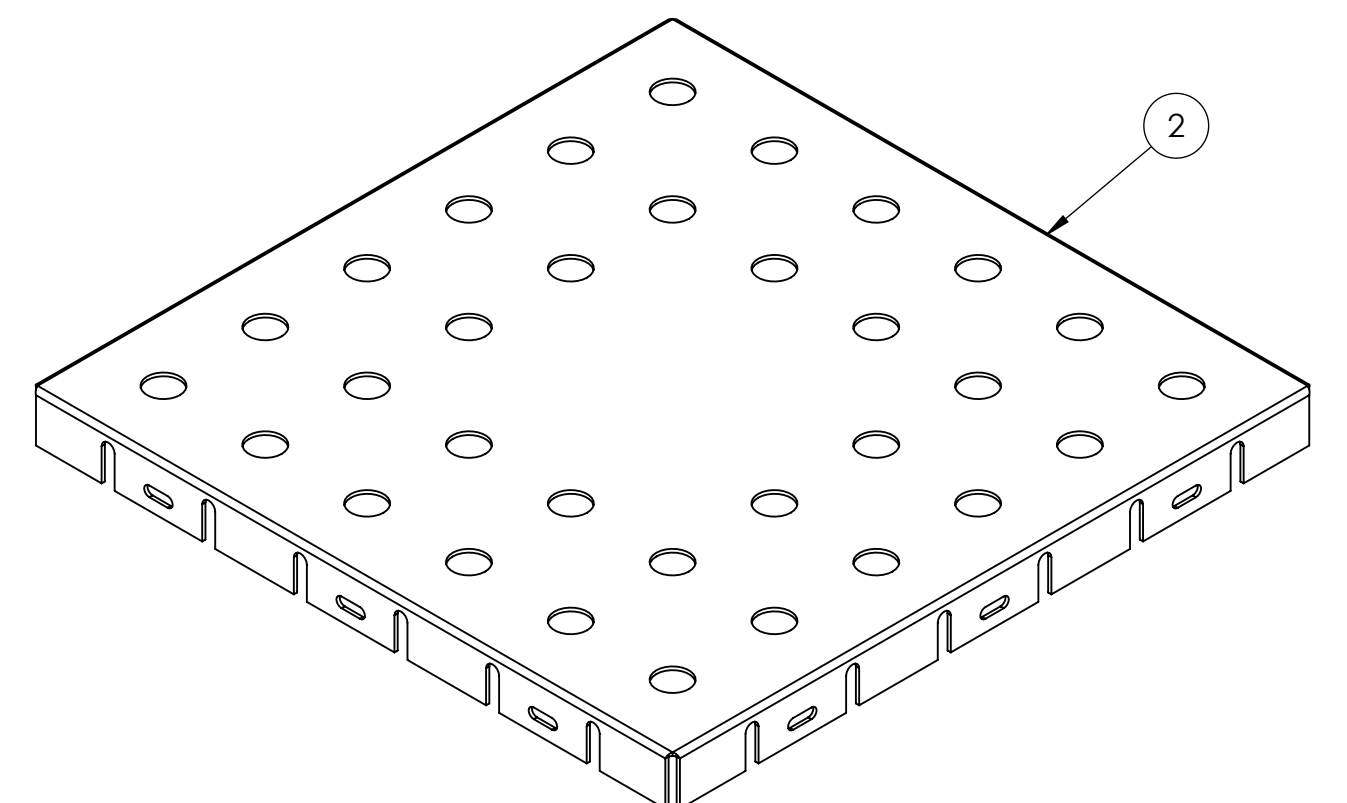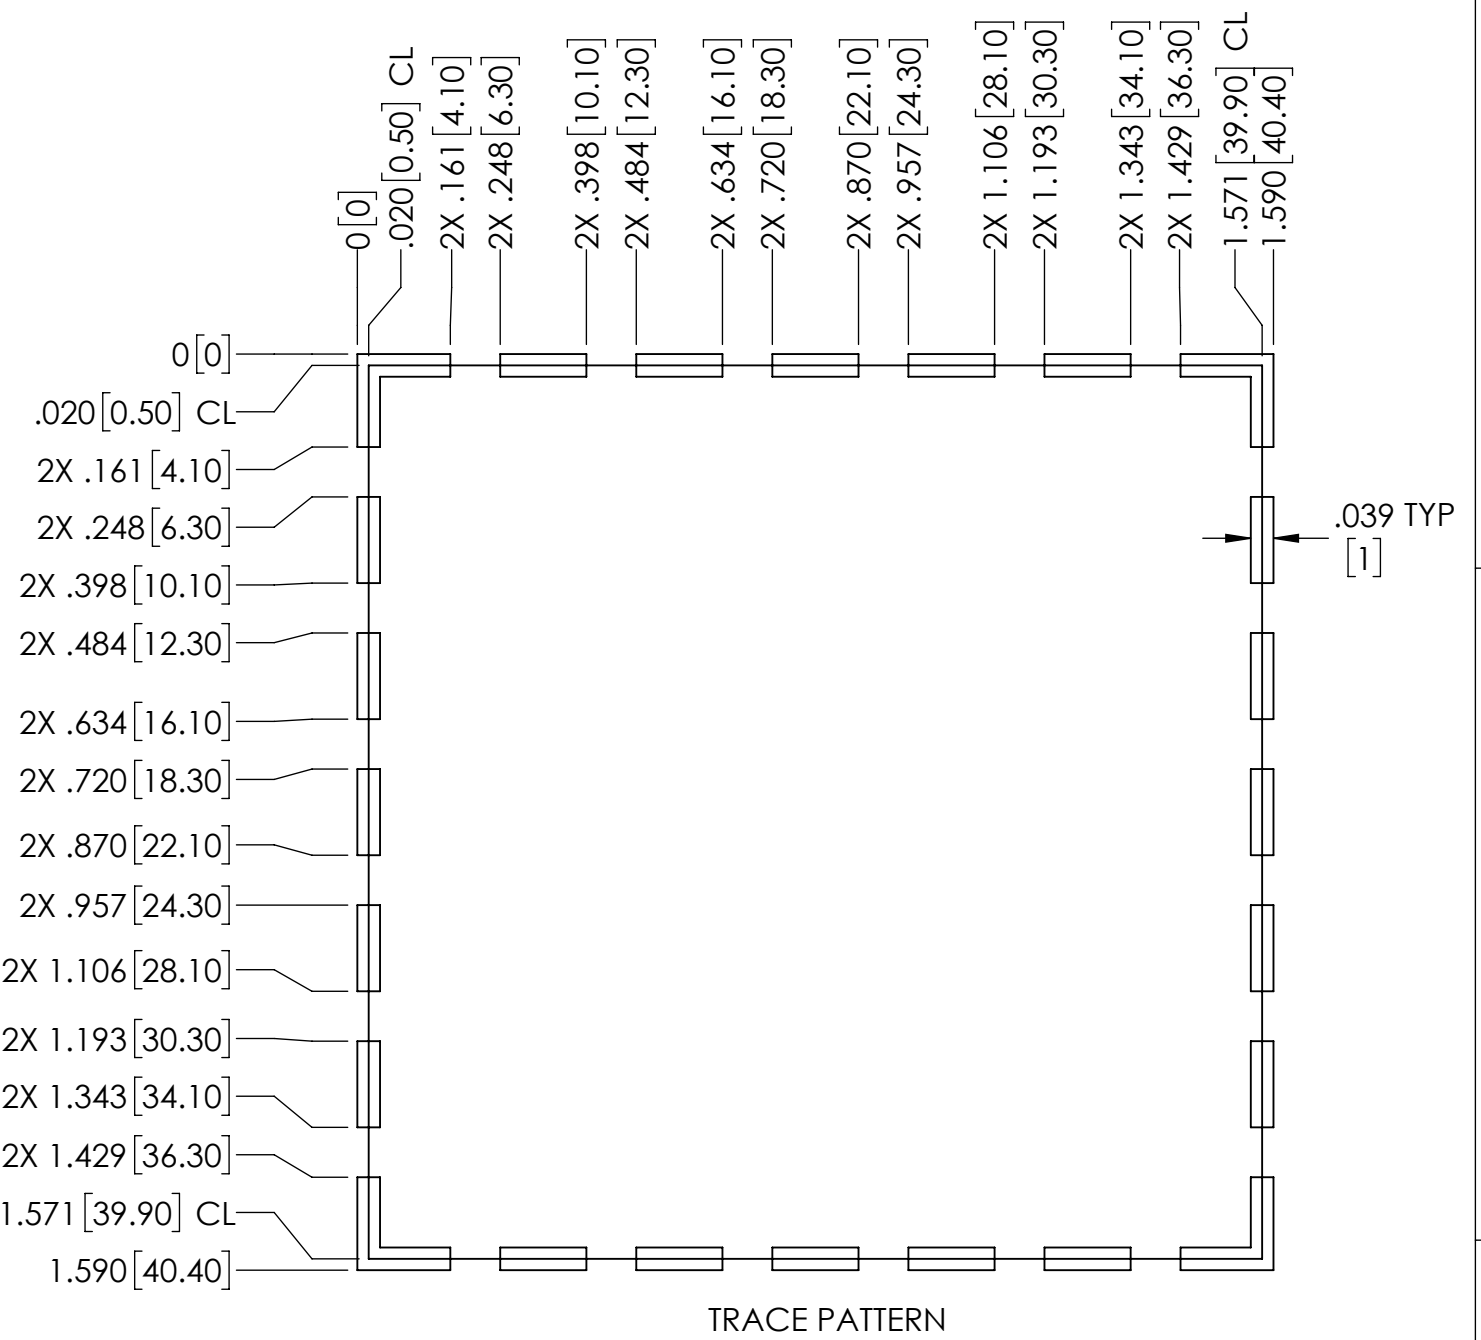

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	SMS-208-N F	FRAME	1
2	SMS-208-N C	COVER	1

UNLESS OTHERWISE SPECIFIED: - ALL DIMENSIONS ARE IN INCHES - PART SHALL BE FREE OF BURRS AND SHARP EDGES - ALL DIMENSIONS SHOWN APPLY TO PLATINGS AND COATINGS - ROPS COMPLIANT PER EU DIRECTIVE 2011/65/EU - POI = POINT OF INTERSECTION		THIRD ANGLE PROJECTION 
.XXX +/- .005[0.13] .XX +/- .010[0.25] .X +/- .020[0.51]		ANGLES +/- 2°
DRAWN BY: JG	APPROVED BY: ND	2015-11-10
FINISH: N/A		
MATERIAL: 0.008[0.201] - ALLOY 770, UNS C77000 PER ASTM B122, H02		

 a HEICO company <i>The Leading Edge in EMI Shielding Technology</i>		
TITLE:		
SURFACE MOUNT SHIELD		
SIZE:	DWG. NO.:	REV:
D	SMS-208-N	D
SCALE:	CAGE CODE:	SHEET:
3:1	41674	1 OF 1